


MIL-DTL-24643 /2

Types: LSDCOP, LSTCOP

APPLICATION

MIL-DTL-24643 Slant Sheet 2. These cables are manufactured with polyolefin insulation. These constructions are non-shielded and non water-blocked. The overall jacket is an irradiation cross-linked modified low smoke zero halogen polyolefin.

Low Smoke, Flexing Service, Shipboard Cables

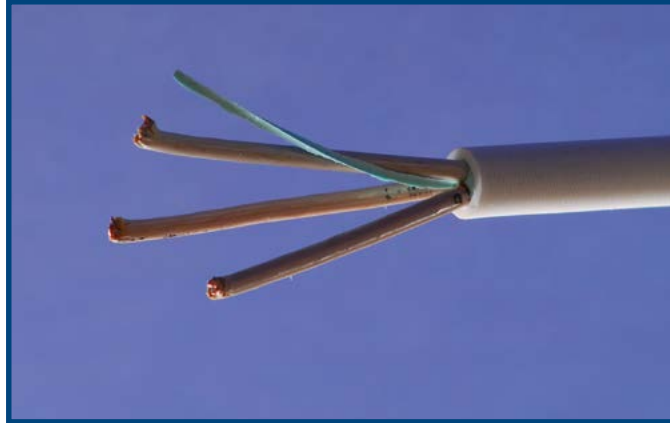

CONSTRUCTION

Nonshielded and non water-blocked.

JACKET

Irradiation cross-linked modified low smoke zero halogen polyolefin.

Cable Type	Size	Slant Sheet	MIL Part Number	Conductor		Shield/ Armor	Product Description
				AWG	Stranding		
LSDCOP	1	2	-01UN	20	7	N	2 conductors, overall XLPO jacket.
LSDCOP	2	2	-03UN	18	16	N	2 conductors, overall XLPO jacket.
LSTCOP	2	2	-04UN	18	16	N	3 conductors, overall XLPO jacket.

The above part numbers represent the more popular constructions. However, other designs are available upon request. All products are manufactured to meet RoHS compliance. For exceptions, please contact our sales department.

